

.050"(1.27mm)Pitch Flat Cable idc Socket

IDC1270 SERIES

SPECIFICATIONS:

- * Current rating : 0.5 Amp
- * Contact resistance : 30mΩ Max.
- * Insulation resistance : 1000MΩ min.
- * Operation Temperature range : -40°C~+105°C.
- * Flat Ribbon Cable With 0.635mm Pitch.
- * Material And Finish
- * Insulator : P.B.T&Glass-fiber reinforced UL 94V-0
- * Insulator Color : Black
- * Contact : Phosphor Bronze




ORDERING CODE

IDC1270 - XX P AF Y B

① ② ③ ④ ⑤ ⑥

- ① SERIES NO.
- ② NO.OF CIRCUIT : 06~80
- ③ TERMINAL MATERIAL
P=PHOSPHOR BRONZE
- ④ CONTACT PLATING
AF=GOLD FLASH
- ⑤ RIB OPTION
Y=W / Relief
N=W / O Relief
- ⑥ COLOR : B=BLACK

P/N: IDC1270 - XX SERIES

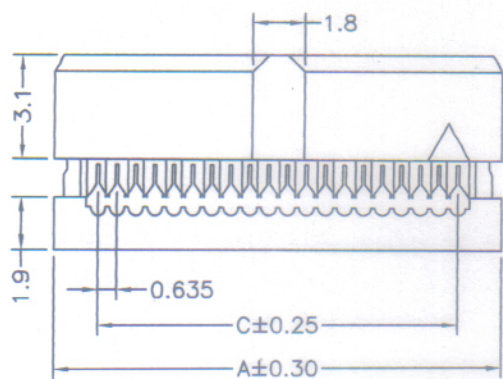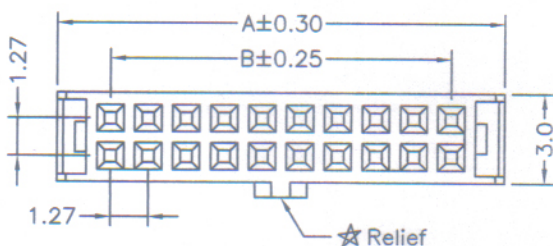

CIRCUITS	DIMENSION			CIRCUITS	DIMENSION			CIRCUITS	DIMENSION		
	A	B	C		A	B	C		A	B	C
6	8.01	2.54	2.54	22	18.17	12.70	12.70	40	29.60	24.13	24.13
8	9.28	3.81	3.81	24	19.44	13.97	13.97	44	32.14	26.67	26.67
10	10.55	5.08	5.08	26	20.71	15.24	15.24	50	35.95	30.48	30.48
12	11.82	6.35	6.35	30	23.25	17.78	17.78	60	42.30	36.83	36.83
14	13.09	7.62	7.62	32	24.52	19.05	19.05	64	44.84	39.37	39.37
16	14.36	8.89	8.89	34	25.79	20.32	20.32	68	47.38	41.91	41.91
20	16.90	11.43	11.43	36	27.06	21.59	21.59	80	55.00	49.53	49.53